


Operation

Back Panel

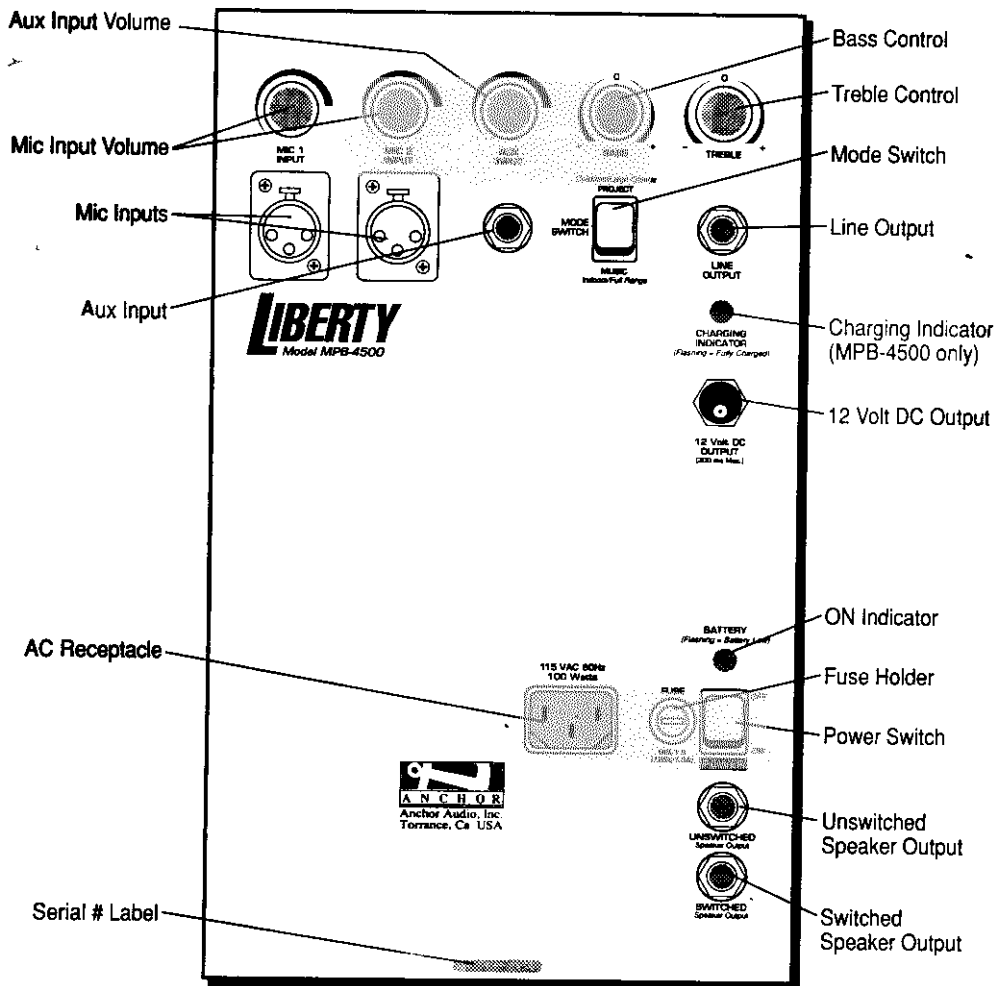

Microphone Inputs

Two low impedance microphones can be connected and blended together through the Liberty. The inputs are balanced low-impedance (600Ω) and phantom powered (15 VDC) for use with condenser-type microphones. The input connectors are standard female XLR type with corresponding volume controls above.

While both Lo-Z balanced and unbalanced microphones work with the Liberty, use a *balanced* microphone to prevent picking up excessive hum or R.F. interference when using long mic cables.